

DC micro motor FF-K30 / 直流微馬達 FF-K30

Precious metal brushes/貴金屬電刷

Typical Applications Optical Instruments: Laptop / CD/ DVD-ROM Drive


Audio and Visual Equipment: Portable CD Player

典型應用

光學設備：手提電腦 / CD/ DVD-ROM 驅動器

音影設備：便携式CD 播放器

Outline Drawing/外形圖

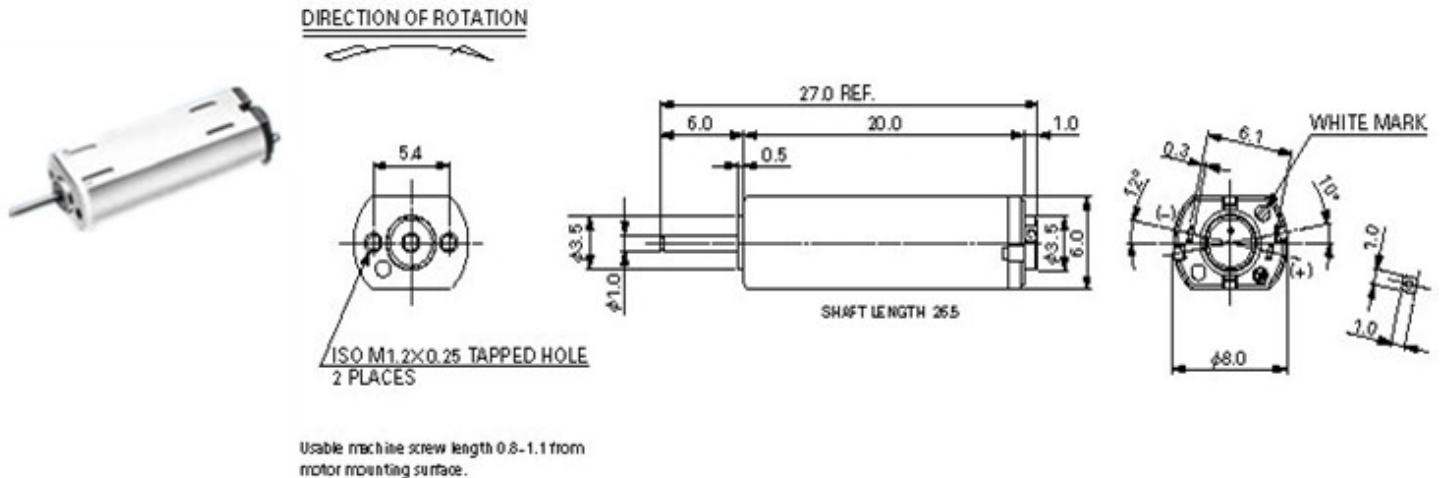

| | | | | |
|----------------------------------|----------|-------------|--|--|
| FF-K30 Series / FF-K30 系列 | Model/型號 | FF-K30-8Z10 | | |
|----------------------------------|----------|-------------|--|--|

Motor data (25°C) / 運行參數 (25°C)

| | | | | |
|--------------------------|------|--------|--|--|
| 1 Operating Voltage/工作電壓 | Volt | 4.2Max | | |
| 2 Nominal voltage/額定電壓 | Volt | 3 | | |
| 3 No-Load speed/空載轉速 | rpm | 15,200 | | |
| 4 No-Load current/空載電流 | mA | 28.0 | | |

At max. efficiency/最大效率點

| | | | | |
|--------------|-----|--------|--|--|
| 1 Current/電流 | mA | 110 | | |
| 2 Torque/轉矩 | mNm | 0.12 | | |
| 3 Speed/轉速 | rpm | 12,020 | | |
| 4 Output/功率 | W | 0.15 | | |

Stall/堵轉

| | | | | |
|--------------|-----|------|--|--|
| 1 Torque/轉矩 | mNm | 0.59 | | |
| 3 Current/電流 | mA | 400 | | |

Additional information/其它相關信息

- Motor parameters can be made according to the request of customer/ 馬達參數可根據客人要求制作



Z. X. D Technology Company Limited

Add: Shuibian Industrial Area, Hengli Town, Dongguan City, China

Tel: 86-769-82927257, ext: 611, 613

Website: <http://www.zxd-motor.com>

Fax: 86-769-82927259

Email: jeff@zxd-motor.com