

DC micro motor FF-M20 / 直流微馬達 FF-M20

Precious metal brushes/貴金屬電刷

Typical Applications

Home Appliances

Optical Instrument: Digital Camera

Audio and Visual Equipment


典型應用

家用电器

光学仪器: 数码相机

音影设备

Outline Drawing/外形圖

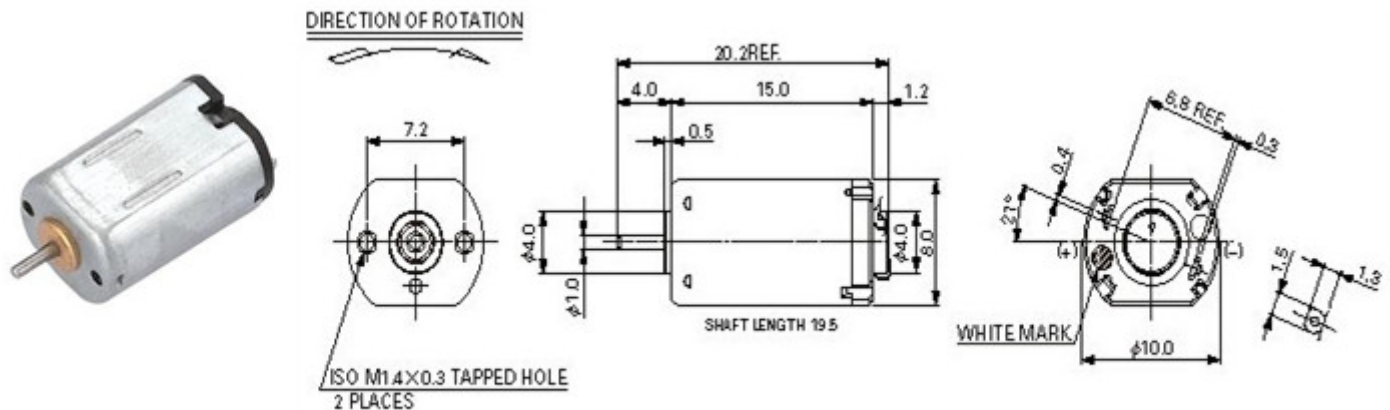

FF-M20 Series /FF-M20 系列

Model/型號

FF-M20-1255

FF-M20-07230

FF-M20-10120

Motor data (25°C)/ 運行參數 (25°C)

		FF-M20-1255	FF-M20-07230	FF-M20-10120
1 Operating Voltage/工作電壓	Volt	1.2-2.0	3.7-6.0	1.5-4.0
2 Nominal voltage/額定電壓	Volt	1.5	3.7	2.8
3 No-Load speed/ 空載轉速	rpm	17,100	12,100	17,800
4 No-Load current/空載電流	mA	94.0	23.0	52

At max. efficiency/最大效率點

		FF-M20-1255	FF-M20-07230	FF-M20-10120
1 Current/電流	mA	330	76	190
2 Torque/轉矩	mNm	0.15	0.13	0.18
3 Speed/轉速	rpm	13,300	9,280	14,050
4 Output/功率	W	0.21	0.13	0.26

Stall/堵轉

		FF-M20-1255	FF-M20-07230	FF-M20-10120
1 Torque/轉矩	mNm	0.69	0.57	0.85
3 Current/電流	mA	150	250	730

Additional information/其它相關信息

- Motor parameters can be made according to the request of customer/馬達參數可根據客人要求制作。



Z. X. D Technology Company Limited

Add: Shuibian Industrial Area, Hengli Town, Dongguan City, China

Tel: 86-769-82927257, ext: 611, 613

Website: <http://www.zxd-motor.com>

Fax: 86-769-82927259

Email: jeff@zxd-motor.com