

DC Gear Motor FF-N20 / 直流微馬達 FF-N20


Typical Applications Automatic Door Lock
Projector
Beauty Appliance

典型應用

自動門鎖
投影儀
美容器械

齒輪箱長度L Length of Gear	減速比 Ratio		
9	100	298	

Outline Drawing/外形圖

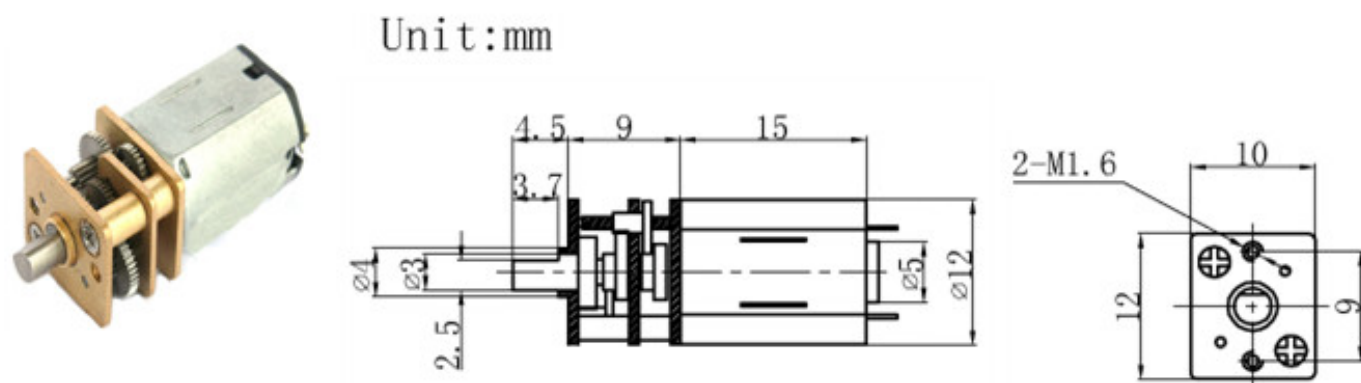

FF-N20 Series / FF-N20 系列	Model/型號	FF-N20-105	FF-N20-155		
---------------------------	----------	------------	------------	--	--

Motor data (25°C)/ 運行參數 (25°C)

1 Nominal voltage/額定電壓	Volt	3	4.5		
2 No-Load speed/ 空載轉速	rpm	102	52		
3 No-Load current/空載電流	A	0.05	0.045		

At max. efficiency/最大效率點

1 Current/電流	A	0.15	0.165		
2 Torque/轉矩	Kg.cm	0.15	0.40		
3 Speed/轉速	rpm	76	41		
4 Output/功率	W	0.11	0.17		

Stall/堵轉

1 Torque/轉矩	Kg.cm	0.60	1.80		
3 Current/電流	A	0.48	0.62		

Additional information/其它相關信息

- Motor parameters can be made according to the request of customer/馬達參數可根據客人要求制作



Z. X. D Technology Company Limited

Add: Shuibian Industrial Area, Hengli Town, Dongguan City, China

Tel: 86-769-82927257, ext: 611, 613

Fax: 86-769-82927259

Website: <http://www.zxd-motor.com>

Email: jeff@zxd-motor.com