


## DC micromotor RS385 / 直流微馬達 RS385

Carbon Brush/ 碳刷

Typical Applications Automotive Products: Automatic Cruise Control/ Intake Manifold Control Valve  
Precision Instruments: Printer/ Copy Machine/ Laser Printer

典型應用

汽車用品: 自動航行控制器, 自動風控系統  
精密設備: 打印機/ 複印機/ 激光打印機

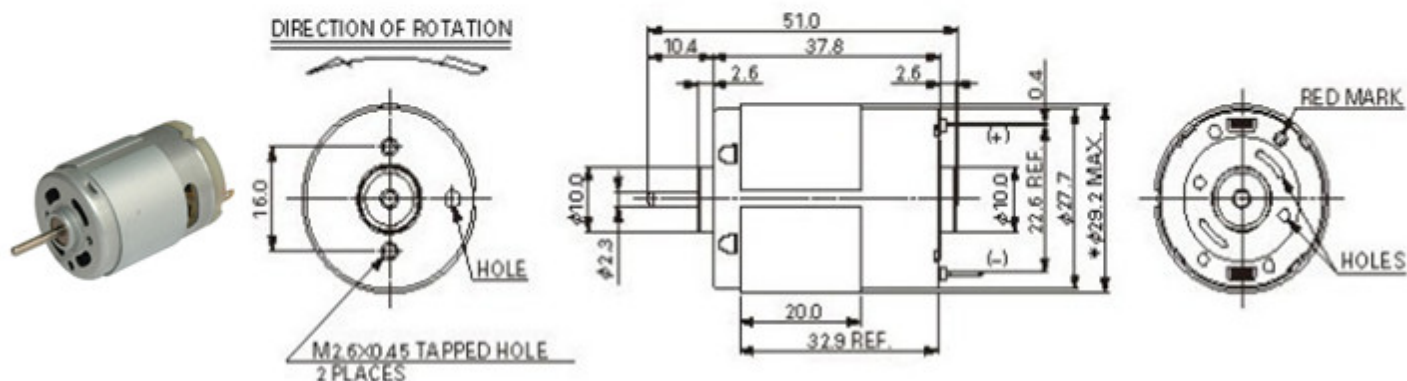

RS385 Series / RS385系列	Model/型號	RS-385-16140	RS-385-17120
------------------------	----------	--------------	--------------

### Motor data (25°C)/ 運行參數 (25°C)

1 Operating Voltage/工作電壓	Volt	12-30	8-35
2 Nominal voltage/額定電壓	Volt	24	23.5
3 No-Load speed/空載轉速	rpm	8,700	8,600
4 No-Load current/空載電流	A	0.07	0.08

### At max. efficiency/最大效率點

1 Current/電流	A	0.41	0.48
2 Torque/轉矩	mNm	8.30	10.10
3 Speed/轉速	rpm	7,420	7,430
4 Output/功率	W	6.44	7.82

### Stall/堵轉

1 Torque/轉矩	mNm	56.40	73.80
3 Current/電流	A	2.35	3.05

### Additional information/其它相關信息

- Motor parameters can be made according to the request of customer/馬達參數可根據客人要求制作



### Z. X. D TECHNOLOGY CO., LTD

Add: Shuibian Industrial Area, Hengli Town, Dongguan City, China

Tel: 86-769-82927257, ext: 611, 613

Website: <http://www.zxd-motor.com>

Fax: 86-769-82927259

Email: [jeff@zxd-motor.com](mailto:jeff@zxd-motor.com)